

CAZ-45 Manual

Model: ZA-51 www.drzamps.com



This symbol warns the user of dangerous voltage levels localized within the enclosure.



This symbol advises the user to read all accompanying literature for safely operating the unit

#### **Important Safety Instructions**

1) Read these instructions.

- 2) Keep these instructions.
- 3) Heed all warnings.
- 4) Follow all instructions.
- 5) Do not use this apparatus near water.
- 6) Clean only with dry cloth.

7) Do not block any ventilation openings. Maintain at least 3 feet of distance around all sides of amplifier. Do not block any ventilation openings with items such as newspapers, tablecloths, curtains, etc.

8) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

9) Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet. 10) Protect the power cord from being walked on or pinched particularly at plugs, convenience

receptacles, and the point where they exit from the apparatus.

11) Only use attachments/accessories specified by the manufacturer.

12) Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.

13) Unplug this apparatus during lightning storms or when unused for long periods of time.

14) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

15) Avoid placing any liquids on or near the amplifier that may splash or drip such as those contained in bottles, cans, glasses, etc.

\*Dr Z amplifiers are capable of producing very high sound pressure levels which can cause temporary or permanent hearing damage.

\*If any screw that is actually on the amp chassis needs to be replaced contact Dr Z Amps for the proper size. Screw size is critical for inner chassis clearances.

#### **General Information**

The CAZ-45 is the first true, modern-voiced high gain amplifier available from Dr. Z. To measure up to the task of creating a high gain amp without sacrificing the touch dynamics, tonal versatility, and hand-wired craftmanship that Dr. Z has built his reputation on, he enlisted his friend, Alan Phillips, the owner-engineer of Carol Ann Amps, to draw up a circuit from scratch. From this collaboration, a full year of prototyping, meticulous tweaking, sampling, and nearly a half dozen prototypes were sent back and forth between the two builders, striving for an amplifier that wasn't just loaded with gain, but also exceptionally responsive to dynamics and fun to play at any volume level.

Uninterested in building a hot-rodded Marshall or supped-up Fender design, they started with a clean drawing board, and Alan and Dr. Z zeroed in on a single channel design that could be controlled by the player's hands, pick attack, and guitar volume knob, which is the secret weapon in a seasoned player's arsenal; an old school approach to a modern sounding amplifier. A unique set of controls straight from both builders' cookbooks are featured on the CAZ. Beyond the gain knob and the ubiquitous EQ section, there's the variable Sensitivity control, as seen on many Carol Ann designs, to tailor the amp's front end to the player's choice of guitar and pickup. Dialed lower, this control ensures clarity with hot-wound or active pickups, and set higher it increases input signal to beef up low wound single coils found in Strats and Teles to maximize thickness and sustain.

Further down the CAZ-45's control panel, the Aggression control is a satisfyingly versatile feature that introduces overdrive in the unique cathode-biased, 6L6-based power section. It creates new harmonic textures and tightens the low-end while focusing the high end to cut through a dense mix like a surgical blade. Set this control lower for warm and smooth classic overdrive as preferred by Alan or dial it up to induce percussive grind, as suggested by Dr. Z, when you just need more, more, and more gain! By utilizing the Gain, Sensitivity, and Aggression controls on the CAZ, you will find that regardless of how much distortion you pile on, balancing these controls will allow you to clean up the amplifier to crystalline, harmonic-rich chime with just the roll back of the guitar volume knob.


Packing this much gain into a hand-wired amplifier was no small task, and to address the concerns of the modern guitarist, Alan included his tube-driven effects loop into the CAZ-45 to integrate the large palette of effects units available on the market. Similarly, Dr. Z wired in his lauded Level control to serve as the answer to loudness concerns. The Level is a volume scaling control, as seen on the popular CURE and JETTA amplifiers, that acts as a master fader on the amplifier to adjust to whatever situation the player finds themselves in. Be it at home practicing with the family within earshot, or on stage where you need enough volume to let all your playing nuances shine, you will not find any lack of singing sustain and crushing gain, nor experience any loss of tone regardless of where the volume is dialed.

Available as a head or head/cab set, Dr. Z suggests pairing the CAZ-45 with our ported Z Best 2x12, configured in a horizontal position for maximum thump and low-end extension. Dr. Z recommends his special speaker blend of the tried and true Celestion V30 and new favorite Celestion Creamback 65 for a pleasingly smooth response without fizz or icepick, a clear, articulate midrange, and extended response in the lows.

Power Output	45 watts
Output Tubes	2- 6L6 STR (cathode biased)
Preamp Tubes	3- 12AX7, 1- 12DW7
Rectifier	Solid State
Controls	Sensitivity, Gain, Treble, Middle, Bass, Aggression, Presence, Level
Speaker Outputs	4, 8, 16 Ohm Outputs
Configurations	Head
Dimensions	Head: 22 3/4"W x 9 3/4"D x 10"H, 35 lbs.
& Weight	

### **Specifications:**

#### **FRONT PANEL**



- **1. Input:** Input jack for your guitar.
- **2. Sensitivity:** Controls the level of signal at the input. This allows you to adjust for the ouput of your pickups. Setting this control higher will fatten up and boost single coils, lowering will clean up hotter humbuckers for a clearer sound.
- **3. Gain:** Controls the amount of preamp distortion.
- 4. Treble: Controls the overall high frequency response.
- 5. Mid: Controls the overall midrange frequency response.
- 6. Bass: Controls the overall low frequency response.

**7. Aggression:** Controls the amount of power stage distortion. Turn this up for a tighter, brighter, and more aggressive distortion loaded with upper frequency harmonics great for fast rhythm playing. Lower this control for a more open and broad response for smooth lead playing and massive sounding open chords. This control will increase the perceived volume level when the Level control is past 12:00.

**8. Presence:** Controls the overall high midrange response. The control's effect will be diminished the higher the Aggression is set, as this control interacts with the same frequency spectrum as the Aggression effects.

9. Level: Controls the overall volume (loudness) of the amp.

**10. Stand-By:** Leave in off position for 1 minute when powering up the amp. Turn on for play. Place in off position for extended break periods.

**11. Power:** Switch up to turn on amplifier. Switch down to turn off amplifier.

**12.** Power Indicator: Lights up when power is switched on. If LED fails replace with a 6.3 volt #44 Bayonet Base(BA9S).

### CAUTION: CHASSIS SURFACE HOT WARNING: TO REDUCE THE RISK OF FRE OF LIECTRICAL SMOCK, DO NOT SERIAL NO. O

**REAR PANEL** 

13. Send Jack: This will send the signal from the amp to the "in" of your effects chain.

**14. Return Jack:** Plug the "out" of your effects chain to return the signal back to the amp.

**15. 16 Ohm Speaker Jack:** Plug in an external 16 Ohm speaker here. Use only one output at a time. Always have a load connected to your amp.

**16. 8 Ohm Speaker Jack:** Plug in an external 8 Ohm speaker here. Use only one output at a time. Always have a load connected to your amp.

**17. 4 Ohm Speaker Jack:** Plug in an external 4 Ohm speaker here. Use only one output at a time. Always have a load connected to your amp.


**18. Fuse:** The fuse protects the amp from electrical faults. Replace only with the same rating and type stated below fuse holder (2A 250v SLO BLO). If the amp repeatedly blows the fuse contact your dealer or Dr. Z Amps. **19. AC Inlet:** (Class I Wiring). This device is used for disconnection from power mains and must remain readily opearable. The power indicator light does not indicate connection to power mains. The power cord must be disconnected to disconnect amplifier from power mains.



### MODEL:

### SERIAL NUMBER:

### INPUT VOLTAGE:

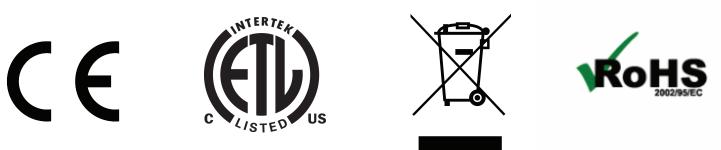

# MADE IN USA

# EC/EU Declaration of Conformity

Document:

CE – ZA-51

Manufacturer: Dr. Z Amplification 17011 Broadway Ave. Maple Heights, OH 44137 -3407 USA

We declare that the designated product (s) DR. Z CAZ-45 is/are in conformity with the European Directives:

2014/30/EU EMC Directive of 26 February 2014

2011/65/EU RoHS Directive of 8 June 2011

2014/35/EU Electrical equipment designed for use within certain voltage limits

This declaration certifies compliance with the indicated directives but implies no warranty of properties. The safety instructions of the accompanying documentation shall be observed. This declaration of conformity is issued under the sole responsibility of the manufacturer.

Issuer:

Dr. Z Amplification 17011 Broadway Ave. Maple Heights, OH 44137 - 3407 USA Maple Heights, OH USA , 01.NOVEMBER.2020

Place, date:

Legally binding signature:

M.D. Zaite, General Manager, Dr. Z Amps



Dr. Z Amps 17011 Broadway Ave. Maple Heights, OH 44137 USA

## CE

### **DECLARATION OF CONFORMITY**

We, Dr. Z Amps, declare, taking this declaration under our total responsibility, that guitar amplifier model CAZ-45 (ZA-51) is in conformity with EN 55013, EN 61000-3-2, EN 61000-3-3, and EN 55020 in accordance with the Directive 2006/95/EC of 12 December 2006, even more declaring that the CE marking was affixed in the year 2001.

11-1-2020

Michael Zaite, General Manager Dr Z Amps